REV.	DESCRIPTION	DATE	DESIGNED
△			

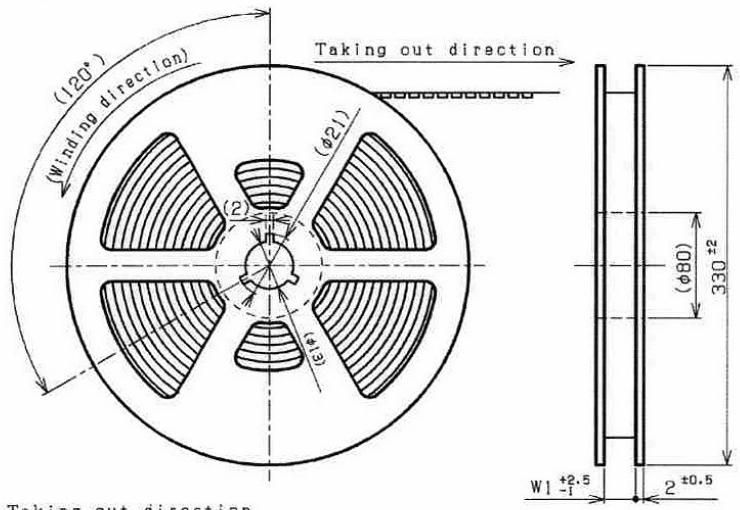

Circuits	Dimensions				
	B0	B2	F	W	W1
2	3.5	1.6	5.5	12	13.5
4	4.7	2.8	5.5	12	13.5
6	5.9	4.0	7.5	16	17.5
10	8.3	6.4	7.5	16	17.5
16	11.9	10.0	11.5	24	25.5
20	14.3	12.4	11.5	24	25.5
22	15.5	13.6	11.5	24	25.5

NOTE

1. Unless otherwise specified, tolerances are ±0.3.
2. Connector part: See the DWG. of the SUR connector.
3. Quantity to be packaged: 3500pcs/reel
4. Leading tape length.

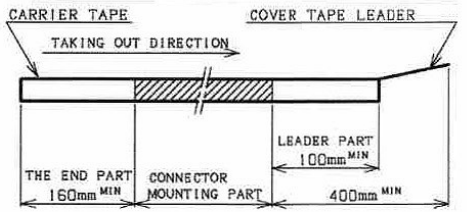

5. Cover tape peel strength: 0.1~1N
(Peel speed: 300mm/minute)

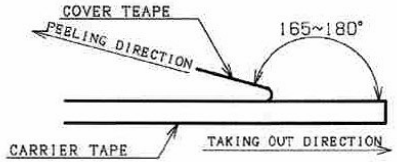

6. Material: Carrier tape; Polyester(PET)
Cover tape ; Polyester(PET)
Reel; Flange ; Polystyrene(PS)
Core ; Polypropylene(PP)
Polystyrene(PS)

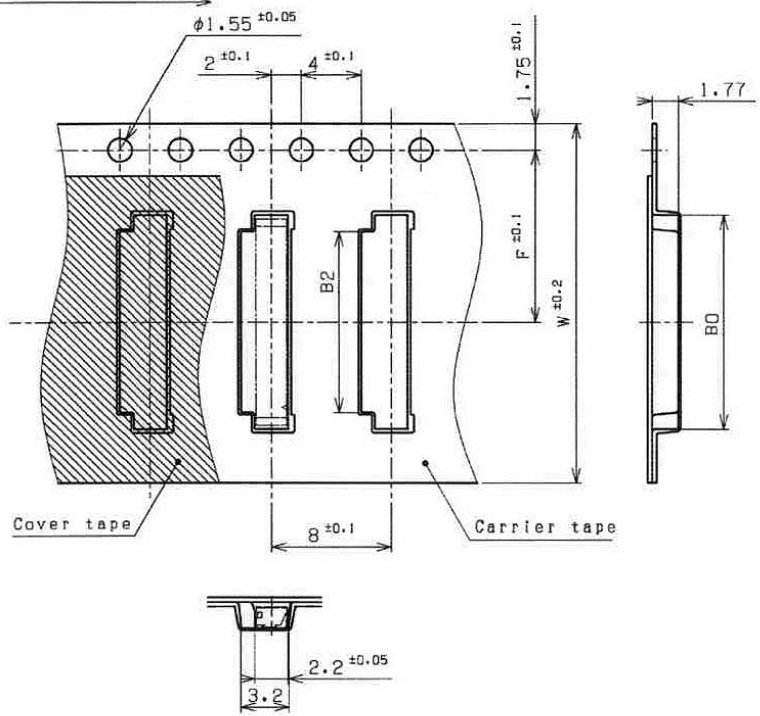

JST CORP
May. 10.2007
WEC

No.	PART NAME	MATERIAL	SURFACE FINISH	REMARKS

SIZE	UNIT	SCALE	PROJECTION	DATE
A3	METRIC	3:1		MAR. 5.2007

APPROVED	CHECKED	DESIGNED	DRAWN
S.S	T.T	M.H	

JST J.S.T.MFG.CO., LTD.

CUSTOMER		
SERIES NAME	XSR CONNECTOR	
PART No.	SM( )B-XSRS-ETB (LF)(SN)	
DRAWING No.	KRD-41040	RO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T.
AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.